

# Driveway Permit Application

For

## Cherry Ridge Township

(for township roads only)

Date \_\_\_\_\_

Applicant Name \_\_\_\_\_ Applicant Address \_\_\_\_\_

Site Address \_\_\_\_\_ Tax Map # 05-0- \_\_\_\_\_ - \_\_\_\_\_

Township Road that driveway attached to if different than above \_\_\_\_\_

Driveway use (ex. Farm, commercial) \_\_\_\_\_

Driveway width \_\_\_\_\_ Length of Driveway \_\_\_\_\_

Turnaround provided at distance \_\_\_\_\_. It is illegal to back onto a township road.

Top coating of material to be used for driveway (ex. Modified, blacktop) \_\_\_\_\_

Radius at edge of travel \_\_\_\_\_

Driveway shall be placed at 90 Degrees to the road.

If not provide angle of attachment. \_\_\_\_\_ Degree of attachment

Slope of finished driveway to or from township road. \_\_\_\_\_ Ft. in 10' - uphill or down hill

Proposed culvert size – Length \_\_\_\_\_ x Diameter \_\_\_\_\_

Site Distance shall be provided prior to visit by zoning officer and maintained the life of the driveway. Site distance is a left and right visibility when 10' back from edge of the road.

Site distance provided is \_\_\_\_\_ Ft.

Provide sketch of driveway on separate paper if necessary.

Water may not be diverted onto any township roadway or onto any property not owned by applicant.

Fee for permit is -- Residential Driveway \$175.00 or Commercial Driveway \$250.00

Reviewed by: \_\_\_\_\_

Approved \_\_\_\_\_ or Denied \_\_\_\_\_

ACCESS TO AND OCCUPANCIES OF HIGHWAYS BY DRIVEWAYS AND LOCAL ROADS  
67 PA CODE CHAPTER 1 PENN. DOT


(i) Grade of access driveway. -

(1) All driveways shall be constructed so as not to impair drainage within the right-of-way, alter the stability of the improved area or change the drainage of adjacent areas.

(2) Where a drainage ditch or swale exists, the permittee shall install adequate pipe under the driveway in accordance with Form 408. Drainage pipe installed under driveways shall be at least 15 inches in diameter.

(3) The side slopes for driveway embankments within the right-of-way shall not be steeper than ten to one. See Figure 6.

(4) Grade requirements in uncurbed shoulders within the right-of-way shall conform to Figure 1.

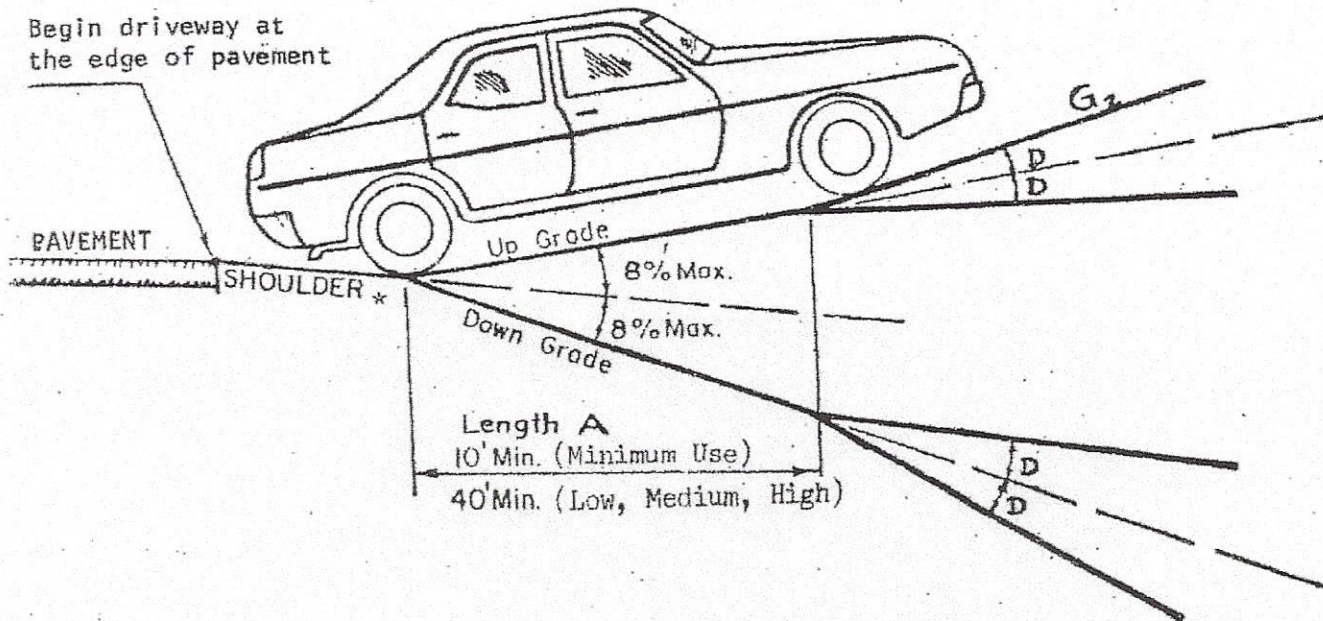

\* The shoulder slope usually varies from  $\frac{1}{2}$ "/ft. (4%) to  $\frac{3}{4}$ "/ft. (5%). However, the shoulder slope should be maintained when constructing the driveway.

For grade changes greater than those shown in Figure 1, vertical curves at least 10 feet long shall be constructed and length "A" shall be increased.

Grades ( $G_2$ ) shall be limited to 15% for minimum use driveways and from five percent to eight percent for low, medium or high volume driveways within the right-of-way.

	Maximum Grade Change (D)	
	Desirable	Maximum
High Volume Driveway	0%	±3%
Medium Volume Driveway	±3%	±6%
Low Volume Driveway	±6%	Controlled by Vehicle Clearance

Figure 1